Created by Simon Tompsett
Facebook - @Doorcards
Email: doorcards@icloud.com

All Rights Reserved

# Door Card instructions – DRIVERS SIDE

Objective – Look like this!

1. Strip out door and remove this plastic bit

All Rights Reserved

2. Attach door strap (use the bolt provided)

3. Clean all the black glue off the top of the door otherwise you will see it

Created by Simon Tompsett
Facebook - @Doorcards
Email: doorcards@icloud.com

All Rights Reserved

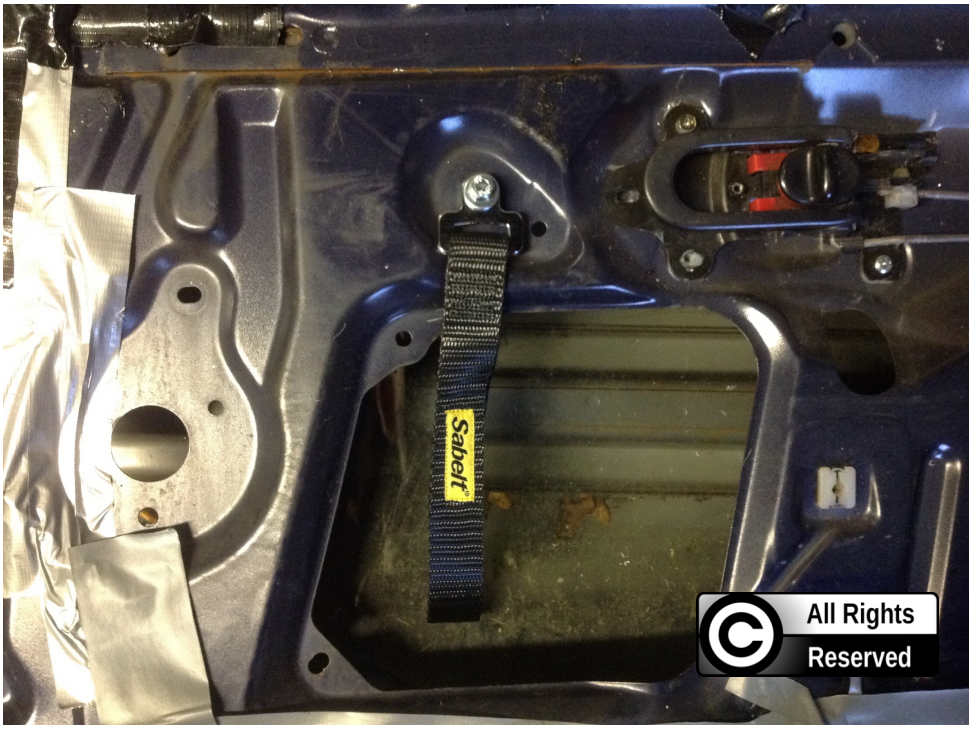

All Rights Reserved

4. Remove any plastic bits so the door card lays flat against the door

5. Hold up the door card to the door in the correct place, fit the door handle trim and stick it on the door with masking tape or another strong tape
    a. Using the pilot holes, mark the positions for the 17 holes on the door
    b. Remove the card
    c. Drills on the holes, say 3mm to start then 6mm and then to 9.5mm
    d. Hover out all the pieces of metal from the bottom of the door
    e. Put grease in all the holes you have drilled

Created by Simon Tompsett
Facebook - @Doorcards
Email: doorcards@icloud.com

All Rights Reserved

6. Fit the 17 fasteners loosely to the door card

All Rights Reserved

7. Fit the door handle trim again and remember to feed the door pull through the door cover hole

8. Fit the bottom 4 fasteners first but do not fully tighten, check all the holes line up and then start putting more in going up and around the sides.

Done!!

Created by Simon Tompsett
Facebook - @Doorcards
Email: doorcards@icloud.com

All Rights Reserved

Door Card instructions – **PASSENGER SIDE**

Same as drivers side!!