



# Installation instructions

## SPS Motorsport seat console MX-5 NA/NB/NBFL Corbeau / Lotus Elise

<b>Date:</b>	26.08.2021	<b>Revision:</b>	1
<b>Editor:</b>	Nico Hafner	<b>Vehicle:</b>	Mazda MX-5 NA/NB/NBFL

### Scope of delivery:

- 1x seat bracket left
- 1x seat bracket right
- 4x Nut M8
- 4x Washer M8
- 2x Hex bolt 7/16x3/4"
- 1x seat bracket front
  - ➔ Splits into following parts (Version 2):
    - 1x bracket part left
    - 1x bracket part right
    - 1x bracket part mid
    - 4x countersunk screw M8x16
    - 4x washer M8
    - 4x nut M8

### Warning:

Please read this instruction before installation and get in touch with the work on the car! Ideally, have the installation done by a professional workshop. Tighten all screws with the torque recommend by the manufacturer. The assembling company is liable for installation mistakes. In case of manufacturing defects, the corresponding components will be replaced without any costs within the warranty period.

Nico Hafner	gez. Nico Hafner
<b>Name of editor</b>	<b>Signature</b>

### **Preparation:**

- Park the vehicle, switch off the engine and let the engine cool down
- Remove driver and passenger seat
- Remove the OEM sliders from your seat to use them later in combination with the SPS seat brackets
- Cut off the OEM belt mount as shown




### **Preparation of electric work:**

- ➔ Skip this part for cars without seat occupancy
- For NBFL you need to place a resistor for the seat occupancy sensor on the passenger side. This is part of every seat package we sell
- Simply plug this resistor in the connector of the seat occupancy (white connector with 3 pins) and fix it in place after placing the seat in the car

### **Mounting the seat brackets on the seat:**

- For Version 2 mount the front bracket like shown on the picture but don't tighten the screws yet
- Place the front bracket on the front studs of the seat
- Tighten the screws when you have centered the front bracket on the seat studs
- Tighten the left and right bracket on the seat
- Place your OEM sliders on the seat brackets using the OEM slider screws and M8 nuts but don't tighten the screws yet
- Place the seat including the seat console into your car and arrange the center position via the elongated holes in the side and front brackets
- Remove the seat with the seat console from the car and tighten the bolts on the inside of the slider
  - ➔ Please be careful by removing the seat to not lose your center position
- Finally place your seat in the vehicle and check your center position. In case you are centered in the car, tighten the screws that connect the sliders to the car
- Repeat these steps for the seat on the other side of the car
  - ➔ The belt whip has to be installed to the center frame of the car, not to the seat console. Most of the MX-5 NA's already have a hole drilled for this. For MX-5 NB, you'll have to drill this hole on your own and install the belt whip with a counter plate (not included)

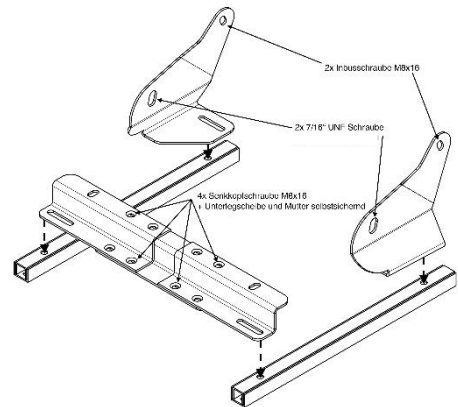

### **Final work on the vehicle:**

- Final check if you are sitting centered in the car and the sliders work properly
- Check if the seat occupancy light turns on, to avoid failure of the seat occupancy resistor. The light should remain turned off

Nico Hafner	gez. Nico Hafner
Name of editor	Signature